

---

October 26, 2023

Mr. Jacob Reiner  
Miami R-I Township School District  
34520 North Highway 41  
Miami, MO 65344

**RE: Drinking Water Sampling – Miami Township School District**  
34520 North Highway 41  
Miami, MO 65344  
**Project Number: 923319**

Mr. Reiner,

OCCU-TEC, Inc. (OCCU-TEC) is pleased to present the following report for drinking water sampling completed at Miami Township School District in Miami, Missouri. The sampling was requested and approved by Mr. Jacob Reiner of Miami R-I Township School District (MTSD). OCCU-TEC completed drinking water sampling of all potential drinking water sources, sources used in food preparation, cleaning, and utensil cleaning. Drinking water sampling was completed in accordance with the requirements set forth in Missouri Senate Bill #681/662 known as the “Get the Lead Out of School Drinking Water Act”.

## **METHODOLOGY**

On September 25<sup>th</sup>, 2023, Mr. Nathaniel Jones of OCCU-TEC completed testing of seventeen (17) sources throughout Miami Township School District. Samples were collected as ‘First Draw’ samples after the fixtures had remained unused for a minimum period of 8 hours. Samples were collected in dedicated, laboratory-provided 250-milliliter plastic sample containers. Sample location information and photographic documentation are noted in the attached table.

Samples were shipped to Teklab, Inc. (Teklab) of Collinsville, Illinois for analysis using EPA method 200.8. Teklab is approved for sample analysis by the Missouri Department of Natural Resources (MDNR) under certification number 00930. A copy of the laboratory analytical results and Chain of Custody documentation are attached to this report.

## RESULTS

Samples results were compared to the regulatory limit of 5 parts per billion (ppb) outlined in Missouri Senate Bill 681/662. Of the samples collected, five (5) of the seventeen (17) contained lead concentrations at or above 5 ppb. Below is a list of samples containing elevated concentrations of lead.

Sample ID	Location	Type	Result (ug/L)
319-MTS-05	Art Room, CL-8	Classroom Sink	9.7
319-MTS-10	Kitchen	Kitchen Sprayer Faucet	264.0
319-MTS-12	South Girls' Restroom	Restroom Sink	8.0
319-MTS-13	South Girls' Restroom	Restroom Sink	14.9
319-MTS-14	South Boys' Restroom	Restroom Sink	5.5

## LIMITATIONS

At the request of MTSD, janitorial closet sinks were excluded from sampling. OCCU-TEC recommends placing signage on all sources not sampled during this assessment that indicate the source is not to be used for drinking water. Sources that were out of service during this assessment should be sampled prior to returning to service.

## RECOMMENDATIONS

The following recommendations are in accordance with Senate Bill 681/662.

In accordance with the requirements set forth in Missouri Bill 681/662, fixtures exhibiting lead concentrations above 5 ppb must be remediated by replacement of lead-containing pipes, solder, fittings or fixtures with lead-free components, or the school shall install filtration at each point where water enters the building until such time as the source can be remediated. If installing a filter is not feasible, the school shall provide purified water at each outlet inventoried.

Additionally, any water coolers or drinking water outlets identified by the United States Environmental Protection Agency (EPA) as not being lead-free under the federal Lead Contamination Control Act of 1988 shall be replaced unless the unit has been tested and determined to have lead results under 5 ppb.

Within two weeks after receiving test results, the school shall make all testing results and any lead remediation plans available on the school's website. The school shall notify parents and staff via written notification within seven (7) business days after receiving test results exceeding 5 ppb. The notification shall include the following:

- Test results and a summary explaining the results.
- A description of any remedial steps taken.

- A description of the general health effects of lead contamination and community specific resources.
- Provide bottled water if there is not enough water to meet the drinking water needs of the students, teachers, and staff.

For fixtures exhibiting results above 5 ppb, follow up random “Flush” sampling shall be conducted annually on at least 25-percent of the remediated outlets until all outlets have been remediated. Drinking water sampling shall be conducted annually and annual drinking water test results shall be submitted by the district to the Department of Health and Senior Services (MDHSS).

**SIGNATURE(S)**

OCCU-TEC appreciates the opportunity to provide the above-referenced consulting services to MTSD. If you have any questions regarding the contents of this report, please contact us at (816) 231-5580.

Respectfully,



Nathaniel Jones  
Environmental Technician





Kevin Heriford  
Director EH&S Dept. (QA/QC)


**ATTACHMENTS**

Outlet Inventory with Analytical Results Summary  
Laboratory Analytical Results and COC Documentation


Drinking Water Assessment  
Miami R-1 Township School District


ID:	319-MTS-01	Location:	North Entry Hall	
Photo:		Manufacturer:	Elkay	
		Description		
		Drinking Fountain Bottle Filler		
		Date Sampled:	9/25/2023	By:
Result:		<1.0	ug/l	
Recommended Action:				

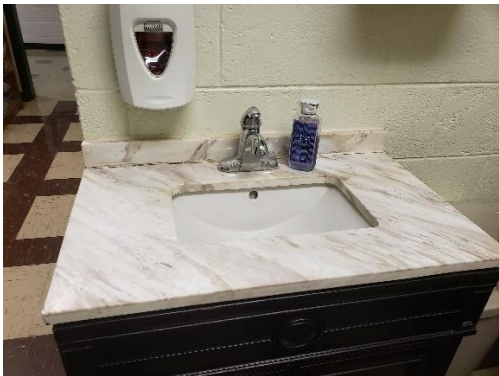
ID:	319-MTS-02	Location:	North Entry Hall	
Photo:		Manufacturer:	Elkay	
		Description		
		Drinking Fountain Bubbler (Left)		
		Date Sampled:	9/25/2023	By:
Result:		<1.0	ug/l	
Recommended Action:				

ID:	319-MTS-03	Location:	North Entry Hall	
Photo:		Manufacturer:	Elkay	
		Description		
		Drinking Fountain Bubbler (Right)		
		Date Sampled:	9/25/2023	By:
Result:		<1.0	ug/l	
Recommended Action:				


Drinking Water Assessment  
Miami R-1 Township School District


ID:	319-MTS-04	Location:	Science, CL-5		
Photo:		Manufacturer:	Unknown		
		Description			
		Classroom Sink			
		Date Sampled:	9/25/2023	By:	NJ
		Result:	3.1	ug/l	
Recommended Action:					


ID:	319-MTS-05	Location:	Art, CL-8		
Photo:		Manufacturer:	Unknown		
		Description			
		Classroom Sink			
		Date Sampled:	9/25/2023	By:	NJ
		Result:	9.7	ug/l	
Recommended Action:		<b>Replace Fixture/Unit and Resample</b>			

ID:	319-MTS-06	Location:	Nurse's Office		
Photo:		Manufacturer:	Peerless		
		Description			
		Nurse Sink			
		Date Sampled:	9/25/2023	By:	NJ
		Result:	1.6	ug/l	
Recommended Action:					

Drinking Water Assessment  
Miami R-1 Township School District


ID:	319-MTS-07	Location:	Kitchen		
Photo:		Manufacturer:	Krowne		
		Description			
		Hand Washing Sink			
		Date Sampled:	9/25/2023	By:	NJ
Result:		3.8	ug/l		
Recommended Action:					


ID:	319-MTS-08	Location:	Kitchen		
Photo:		Manufacturer:	Unknown		
		Description			
		Dish Washing Sink			
		Date Sampled:	9/25/2023	By:	NJ
Result:		2.4	ug/l		
Recommended Action:					


ID:	319-MTS-09	Location:	Kitchen		
Photo:		Manufacturer:	Unknown		
		Description			
		Kitchen Dish Sprayer			
		Date Sampled:	9/25/2023	By:	NJ
Result:		1.1	ug/l		
Recommended Action:					




Drinking Water Assessment  
Miami R-1 Township School District


ID:	319-MTS-10	Location:	Kitchen	
Photo:		Manufacturer:	Unknown	
		Description		
		Kitchen Sprayer Faucet		
		Date Sampled:	9/25/2023	By:
Recommended Action:		Result:	264.0	ug/l
<b>Replace Fixture/Unit and Resample</b>				


ID:	319-MTS-11	Location:	Main Hallway	
Photo:		Manufacturer:	Elkay	
		Description		
		Drinking Fountain Bubbler (Standalone, Out of Order)		
		Date Sampled:	9/25/2023	By:
Recommended Action:		Result:	N/A	ug/l

ID:	319-MTS-12	Location:	South Girls' Restroom	
Photo:		Manufacturer:	Delta	
		Description		
		Restroom Sink (Left)		
		Date Sampled:	9/25/2023	By:
Recommended Action:		Result:	8.0	ug/l
<b>Replace Fixture/Unit and Resample</b>				

Drinking Water Assessment  
Miami R-1 Township School District


ID:	319-MTS-13	Location:	South Girls' Restroom	
Photo:		Manufacturer:	Delta	
		Description		
		Restroom Sink (Right)		
		Date Sampled:	9/25/2023	By:
Recommended Action:		Result:	14.9	ug/l
<b>Replace Fixture/Unit and Resample</b>				


ID:	319-MTS-14	Location:	South Boys' Restroom	
Photo:		Manufacturer:	Delta	
		Description		
		Restroom Sink (Left)		
		Date Sampled:	9/25/2023	By:
Recommended Action:		Result:	5.5	ug/l
<b>Replace Fixture/Unit and Resample</b>				

ID:	319-MTS-15	Location:	South Boys' Restroom	
Photo:		Manufacturer:	Delta	
		Description		
		Restroom Sink (Right)		
		Date Sampled:	9/25/2023	By:
Recommended Action:		Result:	3.4	ug/l



Drinking Water Assessment  
Miami R-1 Township School District

ID:	319-MTS-16	Location:	5th Grade Classroom	
Photo:		Manufacturer:	Unknown	
		Description		
		Restroom Sink		
		Date Sampled:	9/25/2023	By:
		Result:	3	ug/l
Recommended Action:				

ID:	319-MTS-17	Location:	4th Grade Classroom	
Photo:		Manufacturer:	Unknown	
		Description		
		Restroom Sink		
		Date Sampled:	9/25/2023	By:
		Result:	2.6	ug/l
Recommended Action:				

October 18, 2023

Kevin Heriford  
Occu-Tec  
2604 NE Industrial Drive  
Suite 230  
North Kansas, MO 64117  
TEL: (816) 231-5580  
FAX:



Illinois	100226
Kansas	E-10374
Louisiana	05002
Louisiana	05003
Oklahoma	9978

**RE:** 923205 MTS

**WorkOrder:** 23092047

Dear Kevin Heriford:

TEKLAB, INC received 16 samples on 9/28/2023 1:03:00 PM for the analysis presented in the following report.

Samples are analyzed on an as received basis unless otherwise requested and documented. The sample results contained in this report relate only to the requested analytes of interest as directed on the chain of custody. NELAP accredited fields of testing are indicated by the letters NELAP under the Certification column. Unless otherwise documented within this report, Teklab Inc. analyzes samples utilizing the most current methods in compliance with 40CFR. All tests are performed in the Collinsville, IL laboratory unless otherwise noted in the Case Narrative.

All quality control criteria applicable to the test methods employed for this project have been satisfactorily met and are in accordance with NELAP except where noted. The following report shall not be reproduced, except in full, without the written approval of Teklab, Inc.

If you have any questions regarding these tests results, please feel free to call.

Sincerely,



Patrick Riley  
Project Manager  
(618)344-1004 ex 44  
[patrickriley@teklabinc.com](mailto:patrickriley@teklabinc.com)



## Report Contents

<http://www.teklabinc.com/>

---

**Client:** Occu-Tec

**Work Order:** 23092047

**Client Project:** 923205 MTS

**Report Date:** 18-Oct-23

---

**This reporting package includes the following:**

Cover Letter	1
Report Contents	2
Definitions	3
Case Narrative	5
Accreditations	6
Laboratory Results	7
Receiving Check List	23
Chain of Custody	Appended

Client: Occu-Tec

Work Order: 23092047

Client Project: 923205 MTS

Report Date: 18-Oct-23

### Abbr Definition

\* Analytes on report marked with an asterisk are not NELAP accredited

CCV Continuing calibration verification is a check of a standard to determine the state of calibration of an instrument between recalibration.

CRQL A Client Requested Quantitation Limit is a reporting limit that varies according to customer request. The CRQL may not be less than the MDL.

DF Dilution factor is the dilution performed during analysis only and does not take into account any dilutions made during sample preparation. The reported result is final and includes all dilution factors.

DNI Did not ignite

DUP Laboratory duplicate is a replicate aliquot prepared under the same laboratory conditions and independently analyzed to obtain a measure of precision.

ICV Initial calibration verification is a check of a standard to determine the state of calibration of an instrument before sample analysis is initiated.

IDPH IL Dept. of Public Health

LCS Laboratory control sample is a sample matrix, free from the analytes of interest, spiked with verified known amounts of analytes and analyzed exactly like a sample to establish intra-laboratory or analyst specific precision and bias or to assess the performance of all or a portion of the measurement system.

LCSD Laboratory control sample duplicate is a replicate laboratory control sample that is prepared and analyzed in order to determine the precision of the approved test method. The acceptable recovery range is listed in the QC Package (provided upon request).

MBLK Method blank is a sample of a matrix similar to the batch of associated sample (when available) that is free from the analytes of interest and is processed simultaneously with and under the same conditions as samples through all steps of the analytical procedures, and in which no target analytes or interferences should present at concentrations that impact the analytical results for sample analyses.

MDL "The method detection limit is defined as the minimum measured concentration of a substance that can be reported with 99% confidence that the measured concentration is distinguishable from method blank results."

MS Matrix spike is an aliquot of matrix fortified (spiked) with known quantities of specific analytes that is subjected to the entire analytical procedures in order to determine the effect of the matrix on an approved test method's recovery system. The acceptable recovery range is listed in the QC Package (provided upon request).

MSD Matrix spike duplicate means a replicate matrix spike that is prepared and analyzed in order to determine the precision of the approved test method. The acceptable recovery range is listed in the QC Package (provided upon request).

MW Molecular weight

NC Data is not acceptable for compliance purposes

ND Not Detected at the Reporting Limit

NELAP NELAP Accredited

PQL Practical quantitation limit means the lowest level that can be reliably achieved within specified limits of precision and accuracy during routine laboratory operation conditions.

RL The reporting limit the lowest level that the data is displayed in the final report. The reporting limit may vary according to customer request or sample dilution. The reporting limit may not be less than the MDL.

RPD Relative percent difference is a calculated difference between two recoveries (ie. MS/MSD). The acceptable recovery limit is listed in the QC Package (provided upon request).

SPK The spike is a known mass of target analyte added to a blank sample or sub-sample; used to determine recovery deficiency or for other quality control purposes.

Surr Surrogates are compounds which are similar to the analytes of interest in chemical composition and behavior in the analytical process, but which are not normally found in environmental samples.

TIC Tentatively identified compound: Analytes tentatively identified in the sample by using a library search. Only results not in the calibration standard will be reported as tentatively identified compounds. Results for tentatively identified compounds that are not present in the calibration standard, but are assigned a specific chemical name based upon the library search, are calculated using total peak areas from reconstructed ion chromatograms and a response factor of one. The nearest Internal Standard is used for the calculation. The results of any TICs must be considered estimated, and are flagged with a "T". If the estimated result is above the calibration range it is flagged "ET"

TNTC Too numerous to count (> 200 CFU)

**Client:** Occu-Tec

**Work Order:** 23092047

**Client Project:** 923205 MTS

**Report Date:** 18-Oct-23

### Qualifiers

- # - Unknown hydrocarbon
- C - RL shown is a Client Requested Quantitation Limit
- H - Holding times exceeded
- J - Analyte detected below quantitation limits
- ND - Not Detected at the Reporting Limit
- S - Spike Recovery outside recovery limits
- X - Value exceeds Maximum Contaminant Level
- B - Analyte detected in associated Method Blank
- E - Value above quantitation range
- I - Associated internal standard was outside method criteria
- M - Manual Integration used to determine area response
- R - RPD outside accepted recovery limits
- T - TIC(Tentatively identified compound)





## Case Narrative

<http://www.teklabinc.com/>

**Client:** Occu-Tec

**Work Order:** 23092047

**Client Project:** 923205 MTS

**Report Date:** 18-Oct-23

**Cooler Receipt Temp:** N/A °C

---

### Locations

#### Collinsville

**Address** 5445 Horseshoe Lake Road  
Collinsville, IL 62234-7425  
**Phone** (618) 344-1004  
**Fax** (618) 344-1005  
**Email** jhriley@teklabinc.com

#### Collinsville Air

**Address** 5445 Horseshoe Lake Road  
Collinsville, IL 62234-7425  
**Phone** (618) 344-1004  
**Fax** (618) 344-1005  
**Email** EHurley@teklabinc.com

#### Springfield

**Address** 3920 Pintail Dr  
Springfield, IL 62711-9415  
**Phone** (217) 698-1004  
**Fax** (217) 698-1005  
**Email** KKlostermann@teklabinc.com

#### Chicago

**Address** 1319 Butterfield Rd.  
Downers Grove, IL 60515  
**Phone** (630) 324-6855  
**Fax**  
**Email** arenner@teklabinc.com

#### Kansas City

**Address** 8421 Nieman Road  
Lenexa, KS 66214  
**Phone** (913) 541-1998  
**Fax** (913) 541-1998  
**Email** jhriley@teklabinc.com



## Accreditations

<http://www.teklabinc.com/>

Client: Occu-Tec

Work Order: 23092047

Client Project: 923205 MTS

Report Date: 18-Oct-23

State	Dept	Cert #	NELAP	Exp Date	Lab
Illinois	IEPA	100226	NELAP	1/31/2024	Collinsville
Kansas	KDHE	E-10374	NELAP	4/30/2024	Collinsville
Louisiana	LDEQ	05002	NELAP	6/30/2024	Collinsville
Louisiana	LDEQ	05003	NELAP	6/30/2024	Collinsville
Oklahoma	ODEQ	9978	NELAP	8/31/2024	Collinsville
Arkansas	ADEQ	88-0966		3/14/2024	Collinsville
Illinois	IDPH	17584		5/31/2025	Collinsville
Iowa	IDNR	430		6/1/2024	Collinsville
Kentucky	UST	0073		1/31/2024	Collinsville
Missouri	MDNR	00930		5/31/2023	Collinsville
Missouri	MDNR	930		1/31/2025	Collinsville



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-001  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-01  
Collection Date: 09/25/2023 6:32

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		< 1.0	µg/L	1	10/17/2023 12:54	213308



## Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-002  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-02  
Collection Date: 09/25/2023 6:33

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		< 1.0	µg/L	1	10/17/2023 12:58	213308



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-003  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-03  
Collection Date: 09/25/2023 6:34

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		< 1.0	µg/L	1	10/17/2023 8:03	213309





# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-004  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-04  
Collection Date: 09/25/2023 6:35

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		3.1	µg/L	1	10/17/2023 8:07	213309



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-005  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-05  
Collection Date: 09/25/2023 6:38

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		9.7	µg/L	1	10/17/2023 8:40	213309



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-006  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-06  
Collection Date: 09/25/2023 6:40

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		1.6	µg/L	1	10/17/2023 8:44	213309



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-007  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-07  
Collection Date: 09/25/2023 6:42

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		3.8	µg/L	1	10/18/2023 10:17	213309



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-008  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-08  
Collection Date: 09/25/2023 6:43

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		2.4	µg/L	1	10/17/2023 8:52	213309





## Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-009  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-09  
Collection Date: 09/25/2023 6:44

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		1.1	µg/L	1	10/17/2023 8:56	213309



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-010  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-10  
Collection Date: 09/25/2023 6:45

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	10.0		264	µg/L	10	10/18/2023 10:09	213309



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-011  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-12  
Collection Date: 09/25/2023 6:50

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		8.0	µg/L	1	10/17/2023 9:08	213309



## Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-012  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-13  
Collection Date: 09/25/2023 6:51

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		14.9	µg/L	1	10/17/2023 9:04	213309



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-013  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-14  
Collection Date: 09/25/2023 6:53

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		5.5	µg/L	1	10/17/2023 9:33	213309



## Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-014  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-15  
Collection Date: 09/25/2023 6:54

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		3.4	µg/L	1	10/17/2023 9:37	213309



# Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-015  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-16  
Collection Date: 09/25/2023 6:58

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		3.0	µg/L	1	10/17/2023 9:41	213309



## Laboratory Results

<http://www.teklabinc.com/>

Client: Occu-Tec  
Client Project: 923205 MTS  
Lab ID: 23092047-016  
Matrix: DRINKING WATER

Work Order: 23092047  
Report Date: 18-Oct-23  
Client Sample ID: 319-MTS-17  
Collection Date: 09/25/2023 6:59

Analyses	Certification	RL	Qual	Result	Units	DF	Date Analyzed	Batch
<b>EPA 600 4.1.4, 200.8 R5.4, METALS BY ICPMS (TOTAL)</b>								
Lead	NELAP	1.0		2.6	µg/L	1	10/17/2023 9:45	213309





# Receiving Check List

<http://www.teklabinc.com/>

Client: Occu-Tec

Work Order: 23092047

Client Project: 923205 MTS

Report Date: 18-Oct-23

Carrier: Crossroads

Received By: AMD

Completed by:

*Amber Dilallo*

Reviewed by:

*Ellie Hopkins*

On:

29-Sep-23

Amber Dilallo

On:

02-Oct-23

Ellie Hopkins

Pages to follow: Chain of custody

Extra pages included

- |   |  |                              |                                      |                                     |                          |
|---|--|------------------------------|--------------------------------------|-------------------------------------|--------------------------|
| Shipping container/cooler in good condition?            | Yes <input checked="" type="checkbox"/>  | No <input type="checkbox"/>  | Not Present <input type="checkbox"/> | Temp °C                             | N/A                      |
| Type of thermal preservation?                           | None <input checked="" type="checkbox"/> | Ice <input type="checkbox"/> | Blue Ice <input type="checkbox"/>    | Dry Ice                             | <input type="checkbox"/> |
| Chain of custody present?                               | Yes <input checked="" type="checkbox"/>  | No <input type="checkbox"/>  |                                      |                                     |                          |
| Chain of custody signed when relinquished and received? | Yes <input checked="" type="checkbox"/>  | No <input type="checkbox"/>  |                                      |                                     |                          |
| Chain of custody agrees with sample labels?             | Yes <input checked="" type="checkbox"/>  | No <input type="checkbox"/>  |                                      |                                     |                          |
| Samples in proper container/bottle?                     | Yes <input checked="" type="checkbox"/>  | No <input type="checkbox"/>  |                                      |                                     |                          |
| Sample containers intact?                               | Yes <input checked="" type="checkbox"/>  | No <input type="checkbox"/>  |                                      |                                     |                          |
| Sufficient sample volume for indicated test?            | Yes <input checked="" type="checkbox"/>  | No <input type="checkbox"/>  |                                      |                                     |                          |
| All samples received within holding time?               | Yes <input checked="" type="checkbox"/>  | No <input type="checkbox"/>  |                                      |                                     |                          |
| Reported field parameters measured:                     | Field <input type="checkbox"/>           | Lab <input type="checkbox"/> | NA                                   | <input checked="" type="checkbox"/> |                          |
| Container/Temp Blank temperature in compliance?         | Yes <input checked="" type="checkbox"/>  | No <input type="checkbox"/>  |                                      |                                     |                          |

*When thermal preservation is required, samples are compliant with a temperature between 0.1°C - 6.0°C, or when samples are received on ice the same day as collected.*

- |   |   |                             |                   |                                     |
|---|---|-----------------------------|-------------------|-------------------------------------|
| Water – at least one vial per sample has zero headspace?  | Yes <input type="checkbox"/>            | No <input type="checkbox"/> | No VOA vials      | <input checked="" type="checkbox"/> |
| Water - TOX containers have zero headspace?               | Yes <input type="checkbox"/>            | No <input type="checkbox"/> | No TOX containers | <input checked="" type="checkbox"/> |
| Water - pH acceptable upon receipt?                       | Yes <input checked="" type="checkbox"/> | No <input type="checkbox"/> | NA                | <input type="checkbox"/>            |
| NPDES/CWA TCN interferences checked/treated in the field? | Yes <input type="checkbox"/>            | No <input type="checkbox"/> | NA                | <input checked="" type="checkbox"/> |

**Any No responses must be detailed below or on the COC.**

Samples were checked for turbidity and then preserved with nitric acid upon arrival in the laboratory. - amberdilallo - 9/29/2023 3:41:55 PM



